


Invetex Monitoring Systems



IMS2000

The IMS2000 monitors up to 200 Halo-tiles and 50 Aquapede Pods

- 200 Halo-tiles (200 - 2'x2' Halo-tile) covers 800 sq.ft
- 50 Aquapede pods with up to 20 Aquapedes in each pod
- Audible and visual local alarms
- Two independent contact closure interfaces for remote alarms
- RS232/USB computer interface for SNMP monitoring

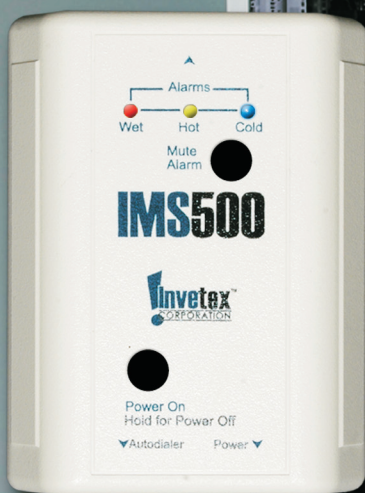

IMS500

The IMS500 controls up to a total of 25 Halo-tiles or Aquapede Pods.

- 25 Halo-tiles (25 - 2'x2' Halo-tile) covers 100 sq.ft
- or 25 Aquapede pods
- Audible and visual local alarms
- Dual contact closure interfaces for remote alarms



Invetex Monitoring Systems (IMS)



The **Invetex Monitoring Systems** (IMS 500/2000) monitor both Halo-Tile and Aquapede systems for moisture and temperature simultaneously or independently.


The monitor system locates and detects leaks and out-of-range temperatures on a per tile (Halo-Tile) and/or per pod (Aquapede) basis and alerts locally with an audible alarm and flashing indicator. Two independent contact closures interface the monitors to existing alarm systems, computers, or auto dialer for remote alerts.

Interface Capabilities: Independent contact closure to interface with existing alarm systems and optional auto dialer. IMS2000 has an RS2/USB interface.

IMS2000 monitors 1 to 200 Halo-Tiles and up to 50 Aquapede Pods.

IMS500 monitors up to 25 Halo-Tiles or Aquapede Pods or a combination of both.

Powered by a standard 110 AC outlet or standard Uninterruptible Power Source (UPS, Battery Backup)



Specifications:

Power Source: Universal AC Wall Power Supply, 5 VDC @ 1.0 amp , UL Listed

Digital Display on IMS2000 and 1000, 64X128 Monochrome Graphic Display

Temperature Range settings: Hot 80 to 140, Cold 32 to 80

Dimensions (inches):

IMS 2000 (5.94" width/1.64" depth/6.766" length)
IMS 500 (3.8" width / 1.51" depth /5.004" length)

Weight:

IMS 2000 - 14 oz
IMS 500 - 9 oz

Mounting: Wall or Flat Surface

Case Material: Flame Retardant ABS

Color: Bone/Blue

Warranty: 1 Year (Factory)

| Invetex Monitor System Capabilities | IMS2000 | IMS500 |
|---|---------|--------|
| Manual On/Off | ● | ● |
| LCD Graphic Display | ● | |
| Temperature Monitoring Capabilities | ● | ● |
| Temperature - Manual Control Settings | ● | |
| Computer Interface RS -232/USB | ● | |
| Central Alarm / Auto Dialer Compatible | ● | ● |
| Audible Alarm | ● | ● |
| Dual Monitoring (Ceiling / Floor) | ● | ● |
| Security Feature Option (Settings Protection) | ● | |
| Detect And Identify Leaks -Tile Specific | ● | |
| Time / Date Stamp | ● | |
| Internal Diagnostics/Error Detection | ● | ● |
| Monitoring - Coverage Area (2X2 Tile) sq.ft | 800 | 100 |



www.invetex.com
Toll Free: 866.582.5029